

©Hitachi Building Systems Co., Ltd.

WATERRAS Tower, 2-101, Kanda Awaji-cho, Chiyoda-ku, Tokyo, 101-8941 Japan
<https://www.hitachi.com/businesses/elevator/index.html>

Contact Address:

The information in this catalogue is subject to change without notice.

Home Elevators

Luxury and convenience in your home



This image is for the illustrative purposes only

CONTENTS

Japan Quality (Advanced Design)	P2
Safety	P4
Comfort	P6
Lineup	P7
Glass Car Design	P9
Deluxe Car Design	P11
Standard Car Design	P13
Large-Depth Car Design	P17
Appearance	P19
Plan View	P21
Specifications	P22

Japan Quality

Our home elevators developed in Japan are designed to fit into your home and villas, to add value with a wide range of advanced design.

Space-Saving

Our Machine-Room-Less design offers minimal overhead, pit depth and shaft dimension.

Single-Phase Power Supply Design

Operating on Single-phase 210-240V which is commonly available in your home and villas.

Earthquake-Resistant Design

Our home elevators complying with The Building Standard Law of Japan conform to the strength section of Japan Earthquake-Resistant standard.

User-Friendly


Our home elevators are designed to ensure the safety and comfort for all people: Providing automatic doors and multi-beam door sensors as standard on all models helps older people and people with disabilities use our home elevator more safely and comfortably.

More Comfort Atmosphere

As our home elevators apply rope type, less odors and no worry for oil leakages which may happen with hydraulic lifts.

Energy-Saving (ECO-Friendly)

The car lighting and electric fan are automatically turned off and standby power is significantly reduced (ECO Mode)
In addition, LED lighting and high efficiently transformer are applied as standard.

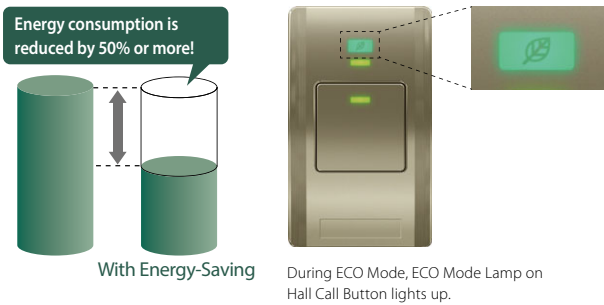

Specifications are subject to change without notice.
Actual color may differ slightly from those shown.



Safety Features

Our home elevators are always provided with a wide range of safety features also found in commercial elevators.

Automatic Rescue Device for Power Failure Standard

Upon electric power supply failure, by using a rechargeable battery, a car automatically moves to the nearest lower floor (Standard) or bottom floor (Optional) and doors open for the safe evacuation of passengers.

Multi-Beam Door Sensor Standard

Multiple infrared light beams cover the door height range of 10mm to 1580mm from the floor level to detect passengers or objects. When any of the beams are blocked, the closing doors immediately reverse to re-open safely.

Overload Detection System Standard

When the car is overloaded, a buzzer sounds and the car does not leave that floor until enough passengers exit the car for the safety. After enough passengers exit the car, the buzzer stops and the car leaves that floor.

Next Drive Operation Standard

If the elevator doors do not open fully at a destination floor, the doors close, and car automatically moves to the next or nearest floor where the doors open.

Nearest Landing Operation for Minor Trouble Standard

If a car has stopped between floors due to some equipment malfunction, the controller checks the cause, and if it is considered safe to move the car, the car will move to nearest floor at a low speed and the door will open.

Car Emergency Lighting Standard

Upon electric power supply failure, Car Emergency Lighting automatically turns on immediately and provides minimum level of lighting within a car by the rechargeable battery.

Emergency Bell Button Standard

A bell located on the top of the car sounds while the button on Car Operating Panel is being pressed. This button alerts persons inside the house.

Modular Jack (for Landline Phone) Standard

Modular Jack is provided in the car for easy installation of a landline phone (provided by customers) that enables passengers to notify or communicate directly with outside.

*It is highly recommended to provide the landline phone in the car to call for help in case of emergency.

*Instead of providing the landline phone, a mobile phone can be kept in the car all the time because USB Power Supply enables the mobile phone to be charged.

*Make sure that outside call over the landline phone or mobile phone is working in advance.



[Access Here for Home Elevators Promotion Movie](#)



Specifications are subject to change without notice.
Actual color may differ slightly from those shown.



*Entrance Door Frame in this image is partially covered by building walls.

Comfort features

Our home elevators offer a wide range of comfort features for your home and villas.

Extending Door Opening Time Standard

Door opening time can be extended by 3 minutes by pressing Door Open Button on Car Operating Panel or Hall Call Button while the doors are open.


USB Power Supply (Type-A/DC5V 2.4A) Standard

USB charging port can be used for various purposes (such as fan, aroma diffuser and air cleaners provided by Customers)



Management Key Switch Standard

Management Key Switch installed at bottom floor deactivates the elevator. For example, owner can take the elevator out of service manually with this switch before leaving the house to prevent children from playing with the elevator.



One Additional Management Key Switch Optional

One Additional Management Key Switch can be applied at any floor other than bottom floor. For example, if Management Key Switch is applied at ground floor (main entrance) and basement floor (garage), owner can more conveniently switch to disable/able the elevator.

Bleep Button Optional

Electric tone sounds to recognize that Hall Call Button or button on Car Operating Panel is pressed.

Electric Fan Optional


Electric Fan on the car ceiling blows the air to keep inside of the car clean.

Car Arrival Chime Optional

Electric chime sounds to announce car arriving before landing on the floor.

Car Indicator Optional

Car Indicator displays information on the car position and operating status clearly.



Hall Position Indicator Optional

Users can easily know the car position and travel direction by clear and big indicator.



100mm Higher Car Ceiling Height and Entrance Height


Car ceiling height and entrance height can be higher by 100mm to feel comfortable atmosphere.

SHA240G: Standard

*Standard: Car ceiling height: 2100mm
Entrance height: 2000mm

Others: Optional

*Standard: Car ceiling height: 2000mm
Entrance height: 1900mm
Optional: Car ceiling height: 2100mm
Entrance height: 2000mm

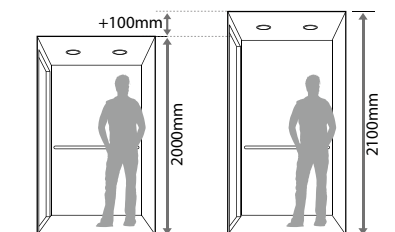

Specifications are subject to change without notice.
Actual color may differ slightly from those shown.

Lineup

		Glass Car Design		Deluxe Car Design		Standard Car Design			Large-Depth Car Design		
		SHA240G		SVC260D	SVC200D	SHA300S		SVC280S	SVC200S	SVC260SL	
Rated Capacity		 240kg / 3 Persons		 260kg / 4 Persons	 200kg / 3 Persons	 300kg / 4 Persons		 280kg / 4 Persons	 200kg / 3 Persons	 260kg / 4 Persons	
Door Type		2-Panel Center Opening		4-Panel Center Opening		2-Panel Center Opening		4-Panel Center Opening		4-Panel Center Opening	
Car											
Rated Speed		Up 20m/min, Down 30m/min					Up 20m/min, Down 30m/min				
Max. Stops		5					5				
Max. Travel	 1-Gate	13m					13m				
	 2-Gate	-	-	10m	-		10m	-			
Car Size		(W)950mm x (D)1150mm x (H)2100mm		(W)950mm x (D)1150mm x (H)2000mm* ¹		(W)950mm x (D)1150mm x (H)2000mm* ¹			(W)880mm x (D)1300mm x (H)2000mm* ¹		
Door Opening Size		(W)800mm x (H)2000mm		(W)800mm x (H)1900mm* ²		(W)800mm x (H)1900mm* ²			(W)800mm x (H)1900mm* ²		

^{*1} Optional: (H)2100mm
^{*2} Optional: (H)2000mm

Specifications are subject to change without notice.
Actual color may differ slightly from those shown.

Glass Car Design (For Indoor / Outdoor Enclosed)

Car Design

Access Here for Design Simulator
Design Simulator enables to visualize
the car and entrance design.



SHA240G
3 Person / 240Kg



- Ceiling** LED Down Light Type: SUS-HL
- Side Walls, Front Return & Transom Panel** SUS-HL
- Car Doors** SUS-HL
- Windows** Large Transparent Glass(Optional)
- Floor** F-33(Optional)
- Handrail** 3 side Handrails(Stainless Steel)
- Telephone** Provided by Customers



Basic Specifications

		SHA240G
Rated Capacity		3 Persons / 240kg
Rated Speed		Up 20m/min, Down 30m/min
Max. Stops		5
Max. Travel	1-Gate	13m
	2-Gate	-
Driving System		Basement Drum Type
Control System		VVVF Inverter Drive
Power Supply		Single-Phase 210V•220V•230V•240V 2-Wired
Door Type		2-Panel Center Opening
Starting Frequency		150 times/day

Entrance Design



- Entrance Doors / Frame** SUS-HL (Optional)
- Windows** Large Transparent Glass (Optional)

- Front Return Panel**
Stainless Steel Plate Hairline
- Transom Panel**
Stainless Steel Plate Hairline
- Car Doors**
Stainless Steel Plate Hairline
- 3 side Handrails**
Stainless Steel

Ceiling Type

LED Down Light Type (CE-VCB-C30)
Stainless Steel Plate Hairline



Diffuser
(Electric Fan: Optional)

Walls
Stainless Steel Plate Hairline

Floor

- [Natural Marble*]** **Optional**
 - Bianco White (F-31)
 - Nero Black (F-32)
 - Tutto White (F-33)
- [Wood]** **Optional**
 - Casual Oak (F-7)
- [Vinyl Floor Tile]**
 - Ajax Soft (F-24) **Optional**
 - Calacatta Gold (F-25) **Optional**
 - Natural Cherry (F-16) **Standard**
 - Dark Brown Oak (F-17) **Standard**
- [Carpet]** **Standard**
 - Light Brown (F-11)
 - Gray (F-12)

Entrance Doors / Entrance Door Frame

- [Stainless Steel Plate]** **Optional**
 - Hairline (SUS-HL)
 - Hairline Titan Gold (MG-GH1)
 - Etching (MD-102)
 - Etching (MD-143)
- [Coated Steel Plate]** **Standard**
 - Urban Black Mahogany (MS90)
 - Dark Mahogany (MS91)
 - Solid Black (MS132)
 - Camel Walnut (MS93)
 - Gilfy Ash (MS134)
 - Cream Feather (MS135)
 - Snow Willow (MS96)
 - Ice White (MS138)

*The pattern is different individually due to the natural stone.

Specifications are subject to change without notice.
Actual color may differ slightly from those shown.

Deluxe Car Design

Car Design

Access Here for Design Simulator
Design Simulator enables to visualize
the car and entrance design.



SVC260D
4 Persons / 260kg



SVC200D
3 Persons / 200kg

Car Design Example



- Ceiling** LED Full Ceiling Light Type
- Stainless Mirror** MR-VCB-NN0-SN
- Rear Wall** MS138
- Side Walls** MS138
- Bottom Wall of Car Operating Panel** MS138
- Floor** F-31 (Optional)
- Handrail (Optional)** Black Wood
- Telephone** Provided by Customers



- Ceiling** LED Down Light Type: MS96
- Stainless Mirror** MR-VCB-NN0-ST (Optional)
- Rear Wall** MS96
- Side Walls** MS90
- Bottom Wall of Car Operating Panel** MS90
- Floor** F-32 (Optional)
- Handrail (Optional)** Black Wood
- Telephone** Provided by Customers

- Ceiling** LED Full Ceiling Light Type
- Stainless Mirror** MR-VCB-NN0-ST (Optional)
- Side Walls** MS96
- Bottom Wall of Car Operating Panel** MS90
- Front Return & Transom Panel** MS96
- Car Doors** MS96
- Windows** Double Slit Gray Smoked Plastic
- Floor** F-31 (Optional)
- Handrail (Optional)** Black Wood
- Telephone** Provided by Customers

Basic Specifications

	SVC260D	SVC200D
Rated Capacity	4 Persons / 260kg	3 Persons / 200kg
Rated Speed	Up 20m/min, Down 30m/min	
Max. Stops	5	
Max. Travel	1-Gate 13m	2-Gate 10m
Driving System	Basement Drum Type	
Control System	VVVF Inverter Drive	
Power Supply	Single-Phase 210V•220V•230V•240V 2-Wired	
Door Type	4-Panel Center Opening	
Starting Frequency	150 times/day	

Entrance Design



- Entrance Doors / Frame** MS135
- Windows** Double Slit Transparent Glass (Optional)

Ceiling / Rear Wall / Side Walls / Bottom Wall of Car Operating Panel / Front Return & Transom Panel

[Coated Steel Plate]

Standard



Urban Black Mahogany (MS90)



Cream Feather (MS135)




Snow Willow (MS96)



Ice White (MS138)

Stainless Mirror



Optional
Stainless Mirror Titan Bronze
(MR-VCB-NN0-ST)



Standard
Stainless Mirror
(MR-VCB-NN0-SN)

Handrail (Optional)
→ P20



Car Doors / Entrance Doors / Entrance Door Frame

[Stainless Steel Plate]

Optional



Hairline (SUS-HL)



Hairline Titan Gold
(MG-GH1)



Etching (MD-102)




Etching (MD-143)

[Coated Steel Plate]

Standard



Urban Black Mahogany
(MS90)



Dark Mahogany (MS91)




Solid Black (MS132)



Camel Walnut (MS93)



Gilfy Ash (MS134)



Cream Feather (MS135)



Snow Willow (MS96)



Ice White (MS138)

Ceiling Type



LED Full Ceiling Light Type (CE-VCB-D30)




LED Down Light Type (CE-VCB-C30)




LED Square Cover Light Type (CE-VCB-E30)

Floor


[Natural Marble*] Optional



Bianco White (F-31)




Nero Black (F-32)



Tutto White (F-33)

[Wood] Optional




Casual Oak (F-7)


[Vinyl Floor Tile]




Ajax Soft (F-24) Optional



Calacatta Gold (F-25) Optional




Natural Cherry (F-16) Standard




Dark Brown Oak (F-17) Standard

[Carpet] Standard



Calm Black (F-21)



Ebony Brown (F-22)

*The pattern is different individually due to the natural stone. Not applicable to 2-Gate Model.

Specifications are subject to change without notice.
Actual color may differ slightly from those shown.

Standard Car Design

Car Design

Access Here for Design Simulator
Design Simulator enables to visualize
the car and entrance design.



SHA300S
4 Persons / 300kg



Car Design Example



- Ceiling** LED Down Light
Type: SUS-HL
(Optional)
- Rear Wall** MR-VCB-NN0-SN
(Optional)
- Side Walls** SUS-HL (Optional)
- Floor** F-12
- Handrail
(Optional)** Stainless Steel
- Telephone** Provided by
Customers

- Ceiling** LED Rectangle Cover
Light Type: MS135
- Rear Wall** MS135
- Side Walls** MS135
- Floor** F-17
- Handrail
(Optional)** Black Wood
- Mirror
(Optional)** Aluminium Frame
- Telephone** Provided by
Customers

- Ceiling** LED Down Light Type: MS96
- Side Walls,
Front Return &
Transom Panel** MS96
- Car Doors** MS96
- Windows** Large Transparent Glass (Optional)
- Floor** F-31 (Optional)
- Handrail (Optional)** Black Wood
- Telephone** Provided by Customers

Basic Specifications

		SHA300S
Rated Capacity		4 Persons / 300kg
Rated Speed		Up 20m/min, Down 30m/min
Max. Stops		5
Max. Travel	1-Gate	13m
	2-Gate	-
Driving System		Basement Drum Type
Control System		VVVF Inverter Drive
Power Supply		Single-Phase 210V•220V•230V•240V 2-Wired
Door Type		2-Panel Center Opening
Starting Frequency		150 times/day

Entrance Design



- Entrance Doors / Frame** SUS-HL
(Optional)
- Windows** Large Transparent Glass
(Optional)

Ceiling / Rear Wall / Side Walls, Front Return & Transom Panel

[Stainless Steel Plate] Optional

Hairline (SUS-HL)

[Coated Steel Plate] Standard

Urban Black Mahogany (MS90) Cream Feather (MS135) Snow Willow (MS96) Ice White (MS138)

[Stainless Mirror](Rear Wall only) Optional

Stainless Mirror (MR-VCB-NN0-SN) Stainless Mirror Titan Gold (MR-VCB-NN0-SG)



Car Doors / Entrance Doors / Entrance Door Frame

[Stainless Steel Plate] Optional

Hairline (SUS-HL) Hairline Titan Gold (MG-GH1) Etching (MD-102) Etching (MD-143)

[Coated Steel Plate] Standard

Urban Black Mahogany (MS90) Dark Mahogany (MS91) Solid Black (MS132) Camel Walnut (MS93)

Gilfy Ash (MS134) Cream Feather (MS135) Snow Willow (MS96) Ice White (MS138)

Ceiling Type

LED Down Light Type
(CE-VCB-C30)

LED Rectangle Cover Light Type
(CE-VCB-A30)

Diffuser
(Electric Fan: Optional)

Floor

[Natural Marble*] Optional

Bianco White (F-31)

Nero Black (F-32)

Tutto White (F-33)

[Wood] Optional

Casual Oak (F-7)

[Vinyl Floor Tile]

Ajax Soft (F-24) Optional

Calacatta Gold (F-25) Optional

Natural Cherry (F-16) Standard

Dark Brown Oak (F-17) Standard

[Carpet] Standard

Light Brown (F-11)

Gray (F-12)

*The pattern is different individually due to the natural stone.

Specifications are subject to change without notice.
Actual color may differ slightly from those shown.

Standard Car Design

Car Design



- Ceiling** LED Down Light Type: SUS-HL (Optional)
Side Walls, Front Return & Transom Panel SUS-HL (Optional)
Car Doors SUS-HL (Optional)
Windows Double Slit Gray Smoked Plastic
Floor F-32 (Optional)
Handrail (Optional) Stainless Steel
Telephone Provided by Customers

Basic Specifications

		SVC280S	SVC200S
Rated Capacity		4 Persons / 280kg	3 Persons / 200kg
Rated Speed		Up 20m/min, Down 30m/min	
Max. Stops		5	
Max. Travel	1-Gate	13m	
	2-Gate	-	10m
Driving System		Basement Drum Type	
Control System		VVVF Inverter Drive	
Power Supply		Single-Phase 210V•220V•230V•240V 2-Wired	
Door Type		4-Panel Center Opening	
Starting Frequency		150 times/day	

Access Here for Design Simulator
Design Simulator enables to visualize
the car and entrance design.



SVC280S
4 Persons / 280kg



SVC200S
3 Persons / 200kg

Car Design Example




- Ceiling** LED Down Light Type: MS96
Rear Wall MS96
Side Walls MS96
Floor F-24 (Optional)
Handrail (Optional) Stainless Steel
Mirror (Optional) Aluminium Frame
Telephone Provided by Customers



- Ceiling** LED Rectangle Cover Light Type: MS138
Rear Wall MR-VCB-NN0-SG (Optional)
Side Walls MS90
Floor F-31 (Optional)
Handrail (Optional) Black Wood
Telephone Provided by Customers

Entrance Design

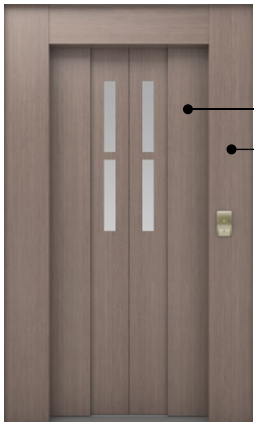

- Entrance Doors / Frame** MS134
Windows Double Slit Transparent Glass (Optional)

Ceiling / Rear Wall / Side Walls, Front Return & Transom Panel

[Stainless Steel Plate] Optional



Hairline (SUS-HL)

[Coated Steel Plate] Standard



Urban Black Mahogany (MS90)



Cream Feather (MS135)



Snow Willow (MS96)



Ice White (MS138)

[Stainless Mirror] (Rear Wall only) Optional



Stainless Mirror (MR-VCB-NN0-SN)



Stainless Mirror Titan Gold (MR-VCB-NN0-SG)



Mirror (Optional)

→ P20

Handrail (Optional)

→ P20

Front Return Panel

Transom Panel

Car Doors / Entrance Doors / Entrance Door Frame

[Stainless Steel Plate] Optional



Hairline (SUS-HL)



Hairline Titan Gold (MG-GH1)



Etching (MD-102)



Etching (MD-143)

[Coated Steel Plate] Standard



Urban Black Mahogany (MS90)



Dark Mahogany (MS91)




Solid Black (MS132)



Camel Walnut (MS93)




Gilfy Ash (MS134)



Cream Feather (MS135)



Snow Willow (MS96)



Ice White (MS138)

Ceiling Type



LED Down Light Type (CE-VCB-C30)




LED Rectangle Cover Light Type (CE-VCB-A30)


Diffuser (Electric Fan: Optional)

Floor


[Natural Marble*] Optional



Bianco White (F-31)




Nero Black (F-32)




Tutto White (F-33)

[Wood] Optional



Casual Oak (F-7)

[Vinyl Floor Tile]




Ajax Soft (F-24)



Calacatta Gold (F-25)




Natural Cherry (F-16)



Dark Brown Oak (F-17)



Light Brown (F-11)



Gray (F-12)

*The pattern is different individually due to the natural stone. Not applicable to 2-Gate Model.

Specifications are subject to change without notice.
Actual color may differ slightly from those shown.

Large-Depth Car Design

Car Design

Access Here for Design Simulator
Design Simulator enables to visualize
the car and entrance design.



SVC260SL
4 Persons / 260kg

Car Design Example



- Ceiling** LED Down Light Type: MS90
- Rear Wall** MS90
- Side Walls** MS90
- Floor** F-7 (Optional)
- Handrail (Optional)** Beige Wood
- Mirror (Optional)** Aluminium Frame
- Telephone** Provided by Customers



- Ceiling** LED Rectangle Cover Light Type: MS135
- Rear Wall** MR-VCB-NN0-SN (Optional)
- Side Walls** MS135
- Floor** F-11
- Handrail (Optional)** Stainless Steel
- Telephone** Provided by Customers

Entrance Design



- Entrance Doors / Frame** MS91
- Windows** Triple Slit Transparent Glass (Optional)

Ceiling / Rear Wall / Side Walls, Front Return & Transom Panel

- [Stainless Steel Plate] Optional**
 - Hairline (SUS-HL)
- [Coated Steel Plate] Standard**
 - Urban Black Mahogany (MS90)
 - Cream Feather (MS135)
 - Snow Willow (MS96)
 - Ice White (MS138)
- [Stainless Mirror] (Rear Wall only) Optional**
 - Stainless Mirror (MR-VCB-NN0-SN)
 - Stainless Mirror Titan Gold (MR-VCB-NN0-SG)


Ceiling Type



LED Down Light Type
(CE-VCB-C30)



LED Rectangle Cover Light Type
(CE-VCB-A30)

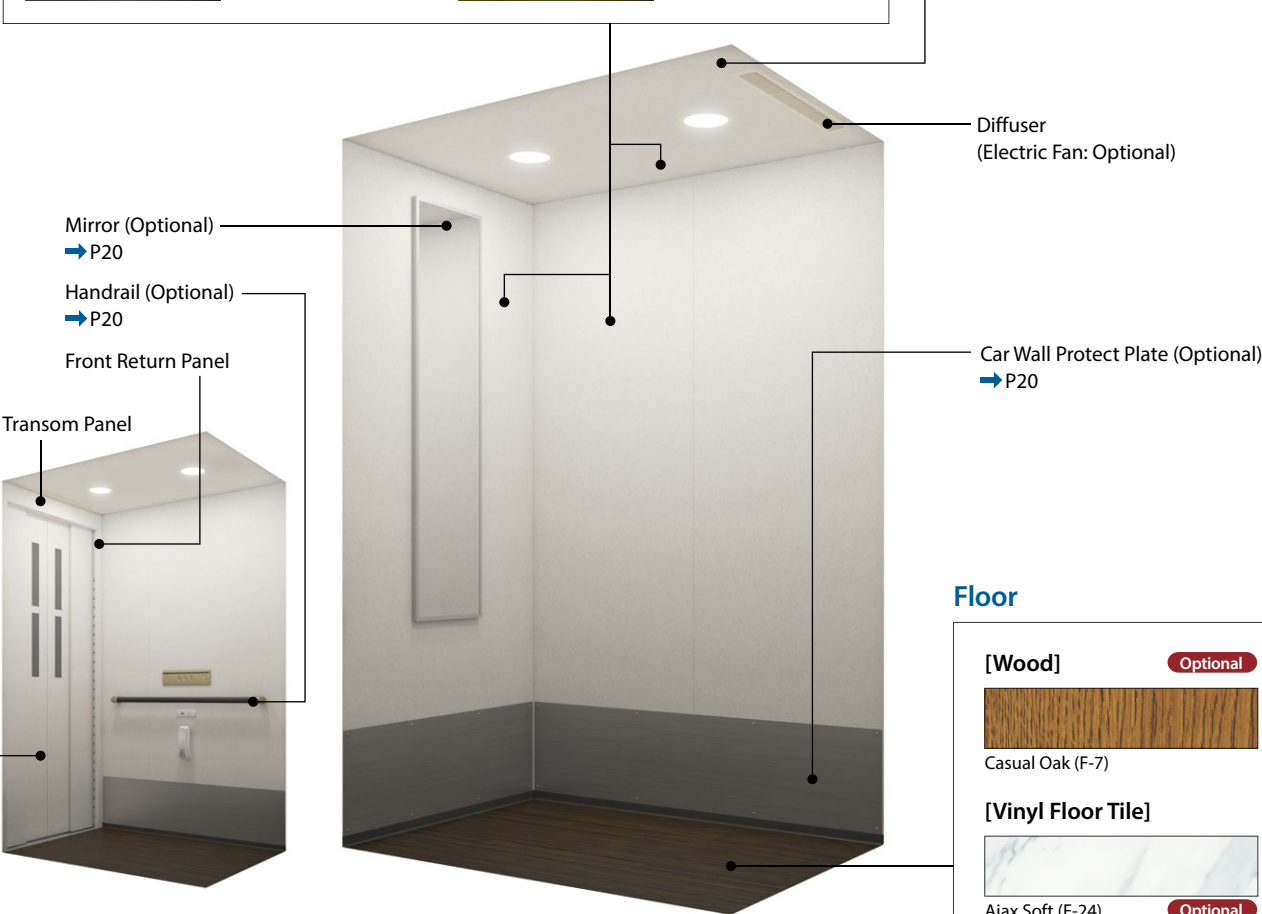

Floor

- [Wood] Optional**
 - Casual Oak (F-7)
- [Vinyl Floor Tile]**
 - Ajax Soft (F-24) Optional
 - Calacatta Gold (F-25) Optional
 - Natural Cherry (F-16) Standard
 - Dark Brown Oak (F-17) Standard
- [Carpet] Standard**
 - Light Brown (F-11)
 - Gray (F-12)

- Ceiling** LED Rectangle Cover Light Type: MS138
- Side Walls, Front Return & Transom Panel** MS138
- Car Doors** MS138
- Windows** Double Slit Gray Smoked Plastic
- Floor** F-12
- Handrail (Optional)** Black Wood
- Telephone** Provided by Customers

Basic Specifications

		SVC260SL
Rated Capacity		4 Persons / 260kg
Rated Speed		Up 20m/min, Down 30m/min
Max. Stops		5
Max. Travel	1-Gate	13m
	2-Gate	-
Driving System		Basement Drum Type
Control System		VVVF Inverter Drive
Power Supply		Single-Phase 210V•220V•230V•240V 2-Wired
Door Type		4-Panel Center Opening
Starting Frequency		150 times/day

Car Doors / Entrance Doors / Entrance Door Frame

- [Stainless Steel Plate] Optional**
 - Hairline (SUS-HL)
 - Hairline Titan Gold (MG-GH1)
 - Etching (MD-102)
 - Etching (MD-143)
- [Coated Steel Plate] Standard**
 - Urban Black Mahogany (MS90)
 - Dark Mahogany (MS91)
 - Solid Black (MS132)
 - Camel Walnut (MS93)
 - Gilfy Ash (MS134)
 - Cream Feather (MS135)
 - Snow Willow (MS96)
 - Ice White (MS138)

* Natural Marble is not applicable to SVC260SL.

Specifications are subject to change without notice.
Actual color may differ slightly from those shown.

Appearances

Car and Entrance Door Windows


2-Panel Center Opening Door (SHA240G/SHA300S)

[Window Type]

Large Transparent Glass Optional



No Window Standard

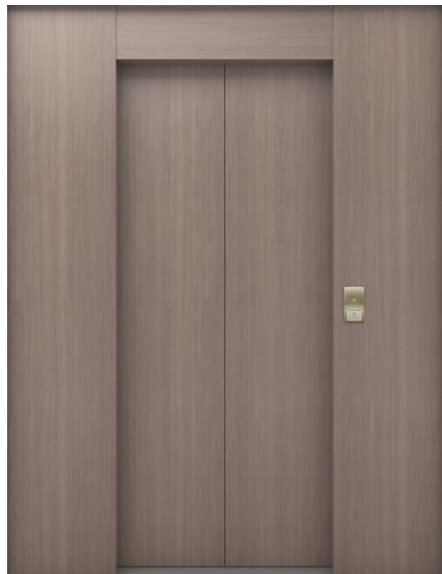

4-Panel Center Opening Door (SVC260D/SVC200D/SVC280S/SVC200S/SVC260SL)

[Window Shape]


Triple Slit* Optional



Double Slit Standard



No Window Standard

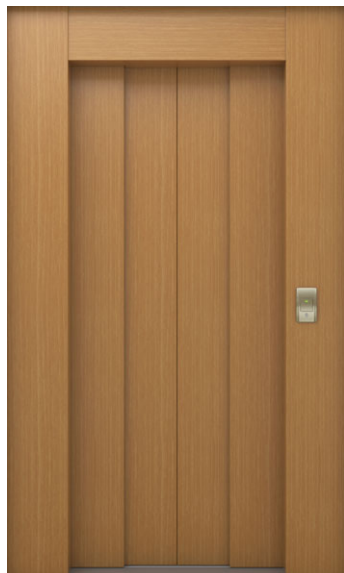

*When 100mm Higher Car Ceiling Height & Entrance Height is applied, Triple Slit is applied as standard.

[Window Material]


Transparent Glass Optional




Gray Smoked Plastic Standard



Handrails Optional

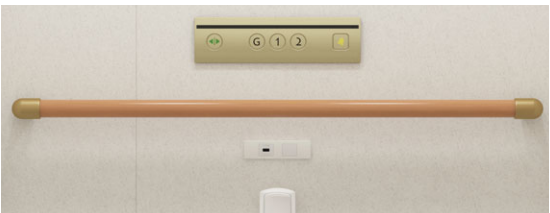

Beige Wood (HR-RJ0-S30W)

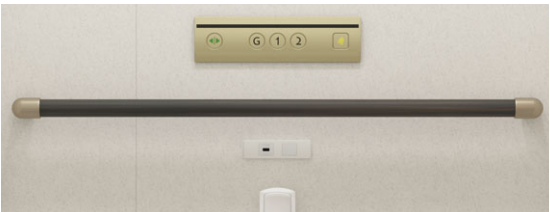

Black Wood (HR-RJ0-S30B)



Stainless Steel (HR-EB0-S30S)

Mirrors Optional



Aluminium Frame
(MR-ED0-AN0-LGN)

Car Wall Protect Plate Optional




Signalization

Car Operating Panel Standard




Message Lamp

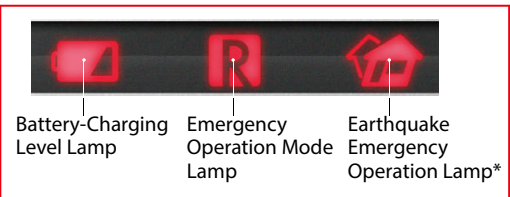


*This lamp lights up only when Earthquake Emergency Operation with P-Wave Sensor (Optional) is applied.

Hall Call Button Standard

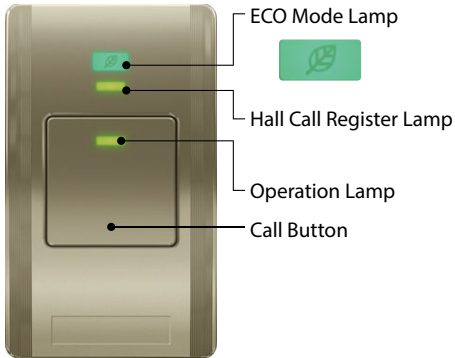


Plan View

Shaft Plan

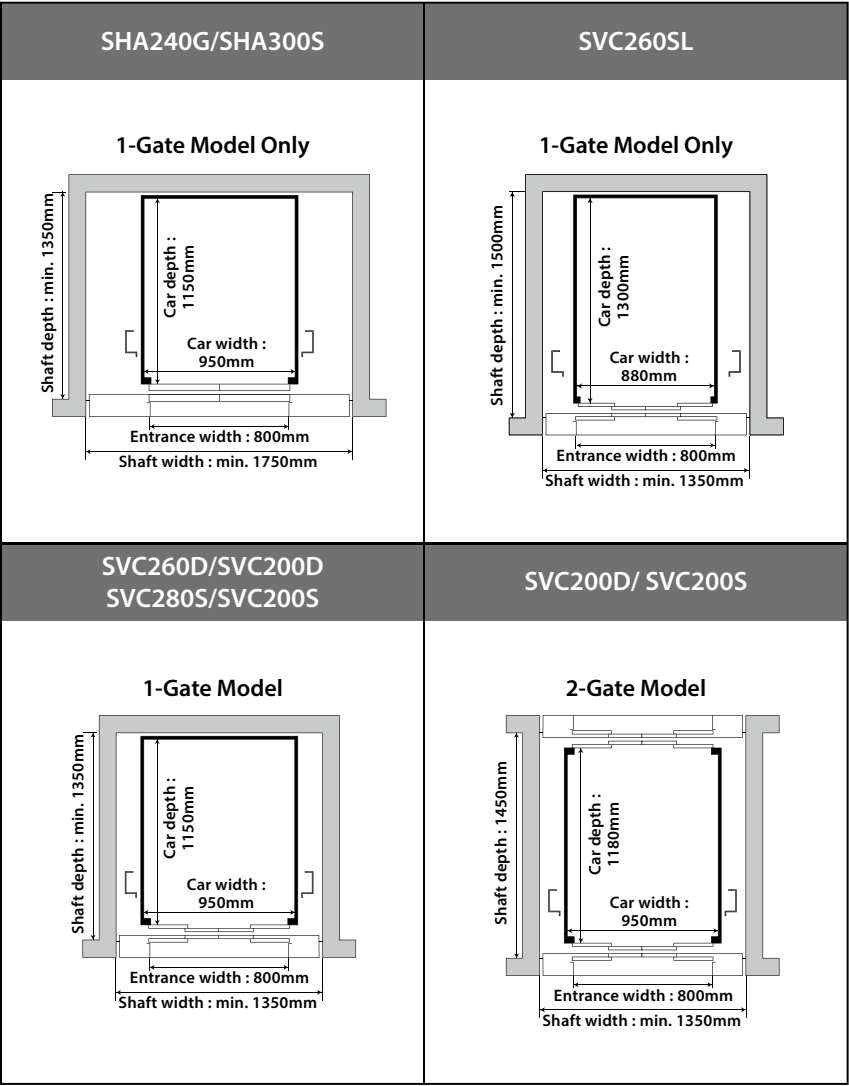

Elevation Plan

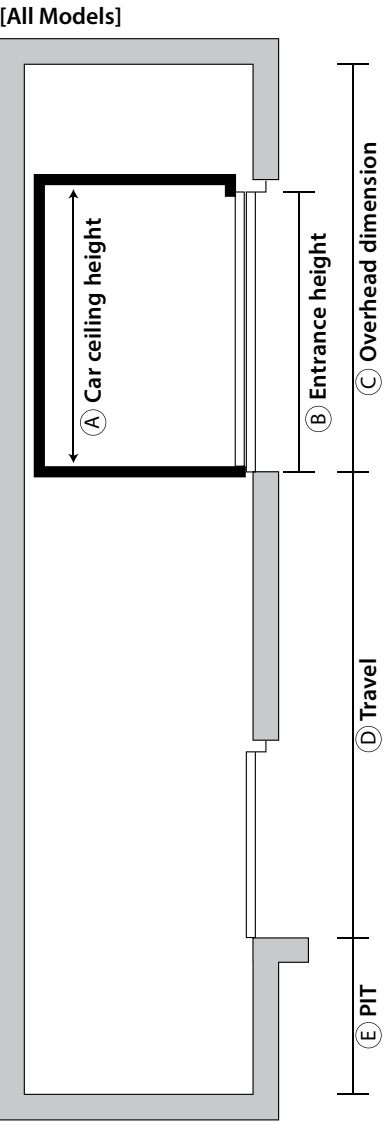

(mm)

Item		Glass Car Design	Deluxe Car Design		Standard Car Design			Large-Depth Car Design
		SHA240G	SVC260D	SVC200D	SHA300S	SVC280S	SVC200S	SVC260SL
Ⓐ Car ceiling height		2100	2000/2100 ^(*)					
Ⓑ Entrance height		2000	1900/2000 ^(*)					
Ⓒ Min. Overhead dimension		2500	2450/2550 ^(*)		2400/2500 ^(*)			
Ⓓ Max. Travel	1Gate Model	13000						
	2Gate Model	-	-	10000	-	-	10000	-
Ⓔ Min. PIT	1Gate Model	560/610 ⁽²⁾						
	2Gate Model	-	-	760/800 ⁽²⁾	-	-	760/800 ⁽²⁾	-

*1 When 100mm Higher Car Ceiling Height & Entrance Height(Optional) is applied
*2 When Double Isolation Unit for Absorbing Vibration and Sound(Optional) is applied

Specifications

Item		Glass Car Design	Deluxe Car Design		Standard Car Design			Large-Depth Car Design
		SHA240G	SVC260D	SVC200D	SHA300S	SVC280S	SVC200S	SVC260SL
Safety Feature	Multi-Beam Door Sensor(MBDS)	●	●	●	●	●	●	●
	Overload Return Door System(ORS)	●	●	●	●	●	●	●
	Nearest Landing operation for Minor Trouble(NLNO)	●	●	●	●	●	●	●
	Next Drive Operation(NXTD)	●	●	●	●	●	●	●
	Overload Detection System(OLDS)	●	●	●	●	●	●	●
	Automatic Rescue Device for Power Failure(ARD) Landing on Nearest Lower Floor	●	●	●	●	●	●	●
	Automatic Rescue Device for Power Failure(ARD) Landing on Bottom Floor	○	○	○	○	○	○	○
	Car Emergency Lighting(CEML)	●	●	●	●	●	●	●
	Emergency Bell Button	●	●	●	●	●	●	●
Energy-Saving	Unintended Car Movement Protection System	●	●	●	●	●	●	●
	ECO Mode	●	●	●	●	●	●	●
Car Design	Handrail (Wood / Stainless Steel)	● ^{*4}	○	○	○	○	○	○
	Mirror (Aluminium Frame)	-	-	-	○	○	○	○
	Electric Fan	○	●	●	○	○	○	○
	Car Wall Protect Plate	○	-	-	○	○	○	○
	Stainless Steel Plate (Ceiling / Wall / Front Return & Transom Panel)	●	-	-	○	○	○	○
	Stainless Steel Plate (Car Doors)	●	○	○	○	○	○	○
	Stainless Mirror (at Whole Rear Wall)	-	-	-	○	○	○	○
	Stainless Mirror Titan Gold (at Whole Rear Wall)	-	-	-	○	○	○	○
	Stainless Mirror (at Center Panel of Rear Wall & at Panel above Car Operating Panel)	-	●	●	-	-	-	-
Floor	Stainless Mirror Titan Bronze (at Center Panel of Rear Wall & at Panel above Car Operating Panel)	-	○	○	-	-	-	-
	Carpet (F-11, F-12)	●	-	-	●	●	●	●
	Carpet (F-21, F-22)	-	●	●	-	-	-	-
	Vinyl Floor Tile (F-16, F-17)	●	●	●	●	●	●	●
	Vinyl Floor Tile (F-24, F-25) / Wood	○	○	○	○	○	○	○
Comfort	Natural Marble (F-31, F-32, F-33) ^{*1}	○	○	○	○	○	○	-
	2-Gate Model (Only one side opening at each floor)	-	-	○	-	-	○	-
Car & Entrance Door Windows	100mm Higher Car Ceiling Height and Entrance Height	●	○	○	○	○	○	○
	No Window	●	●	●	●	●	●	●
	Large Transparent Glass Windows	○	-	-	○	-	-	-
	Double Slit Plastic Windows	-	●	●	-	●	●	●
	Double Slit Transparent Glass Windows	-	○	○	-	○	○	○
	Triple Slit Plastic Windows ^{*2}	-	○	○	-	○	○	○
Entrance Design	Triple Slit Transparent Glass Windows	-	○	○	-	○	○	○
	Stainless Steel Plate	○	○	○	○	○	○	○
Function	Message Lamp (on Car Operating Panel)	●	●	●	●	●	●	●
	Modular Jack / USB Power Supply	●	●	●	●	●	●	●
	Extending Door Opening Time (3 Minutes)	●	●	●	●	●	●	●
	Management Key Switch (Bottom Floor)	●	●	●	●	●	●	●
	One Additional Management Key Switch	○	○	○	○	○	○	○
	Double Isolation Unit for Absorbing Vibration and Sound ^{*3}	○	○	○	○	○	○	○
	Earthquake Emergency Operation(EEMO) with P-Wave Sensor	○	○	○ ^{*5}	○	○	○ ^{*5}	○
	Fire Emergency Operation(FEMO)	○	○	○	○	○	○	○
	Flood Emergency Operation	○	○	○	○	○	○	○
	Car Indicator	○	○	○ ^{*5}	○	○	○ ^{*5}	○
	Hall Position Indicator	○	○	○	○	○	○	○
	Car Arrival Chime	○	○	○	○	○	○	○
	Bleep Button	○	○	○	○	○	○	○

*1 Not applicable to 2-Gate Model.
*2 When 100mm Higher Car Ceiling Height and Entrance Height (Optional) is applied, Triple Slit Plastic Windows are applied as standard.
*3 Shall be applied for Maisonette residence. Not applicable when travel is over 10m.
*4 3 side handrails (Stainless Steel) is Standard
*5 Required by Building Standard Law of Japan when travel is over 7m.

NOTE1 No fuse breaker for home elevator shall be inverter compatible model supplied by others.
NOTE2 Applicable standard: Building Standard Law of Japan for SVC200D, SVC200S
Manufacturer's Standard for SHA240G, SVC260D, SHA300S, SVC280S, SVC260SL

Specifications are subject to change without notice.
Actual color may differ slightly from those shown.